





MODELS
10DA - L
10DA - L50
10DA - L500

MODEL 10DA - L
MODEL 10DA - L50
MODEL 10DA - L500
DYNAMIC MICROPHONES

The Astatic Models 10DA-L, 10DA-L-50 and 10DA-L-500 are dynamic microphones especially designed for SSB equipment but capable of excellent performance on all communication equipment. All models are of rugged construction with bright, polished chrome finish, capable of up to 90° head tilt with adjustable tension, and threaded to mount on all Astatic stands having Astatic's unique "Plug-In" design. The Model 10DA-L is a high impedance microphone and the 10DA-L-50 and 10DA-L-500 are low impedance microphones.


FEATURES and SPECIFICATIONS

- TYPE: Dynamic
- IMPEDANCE: 10DA-L : 40K ohms
10DA-L-50 : 50 ohms
10DA-L-500: 500 ohms
- OUTPUT LEVEL: 10DA-L : -52 dB (0dB = 1 volt/microbar)
10DA-L-50 : -79 dB (0dB = 1 volt/microbar)
 -54 dB (0dB = 1 mw/10 microbars)
10DA-L-500: -71 dB (0dB = 1 volt/microbar)
 -54 dB (0dB = 1 mw/10 microbars)
- RECOMMENDED LOAD: 10DA-L : 40K ohms or greater
10DA-L-50 : 40 - 250 ohms
10DA-L-500: 250 - 1000 ohms
- FREQUENCY RESPONSE: 300 to 3000 Hz. See Fig. 1.
- FINISH: All metal construction with a bright polished chrome finish.
- RECOMMENDED USE: Use with any Astatic desk stand having "Plug-In" feature or with Astatic's F-11 adaptor.
- DIMENSIONS: 105 mm (4") high; 63.5 mm (2½") wide; 76.2 mm (3") deep.
- WEIGHT: 383 grams (13½ oz.)

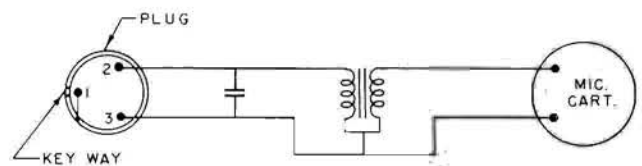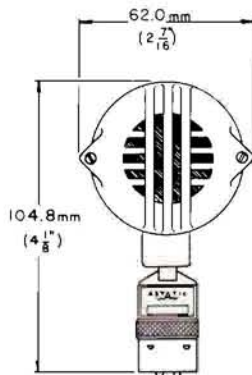

SCHEMATIC
10DA, 10DA-50, 10DA-500

NOTE: 10DA-500 DOES NOT HAVE A TRANSFORMER

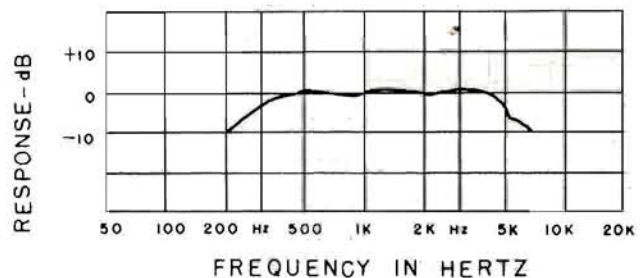

Printed in U.S.A.

ASTATIC CORP., Conneaut, Ohio 44030 - 0120 (216) 593 - 1111, Telex 980712

EXPORT: International Division, Conneaut, Ohio 44030 - 0120 USA Telex 980712

IN CANADA: Canadian Astatic Ltd., 1830 Ellesmere Rd., Scarborough, Ontario M1H 2V5, (416) 438 - 6384

● CARTRIDGES ● NEEDLES ● PICKUPS ● MICROPHONES ● ACCESSORIES