


REVISIONS				
LTR	DESCRIPTION	DR	CHK	APPR'D DATE
A	RELEASE	MP	3/20/86	3/86
B	INC ADCN AI ECP 0262	MP	3/20/86	8-86
C	INC ADCN B1 ECP 0000	MP	3/27	1-87

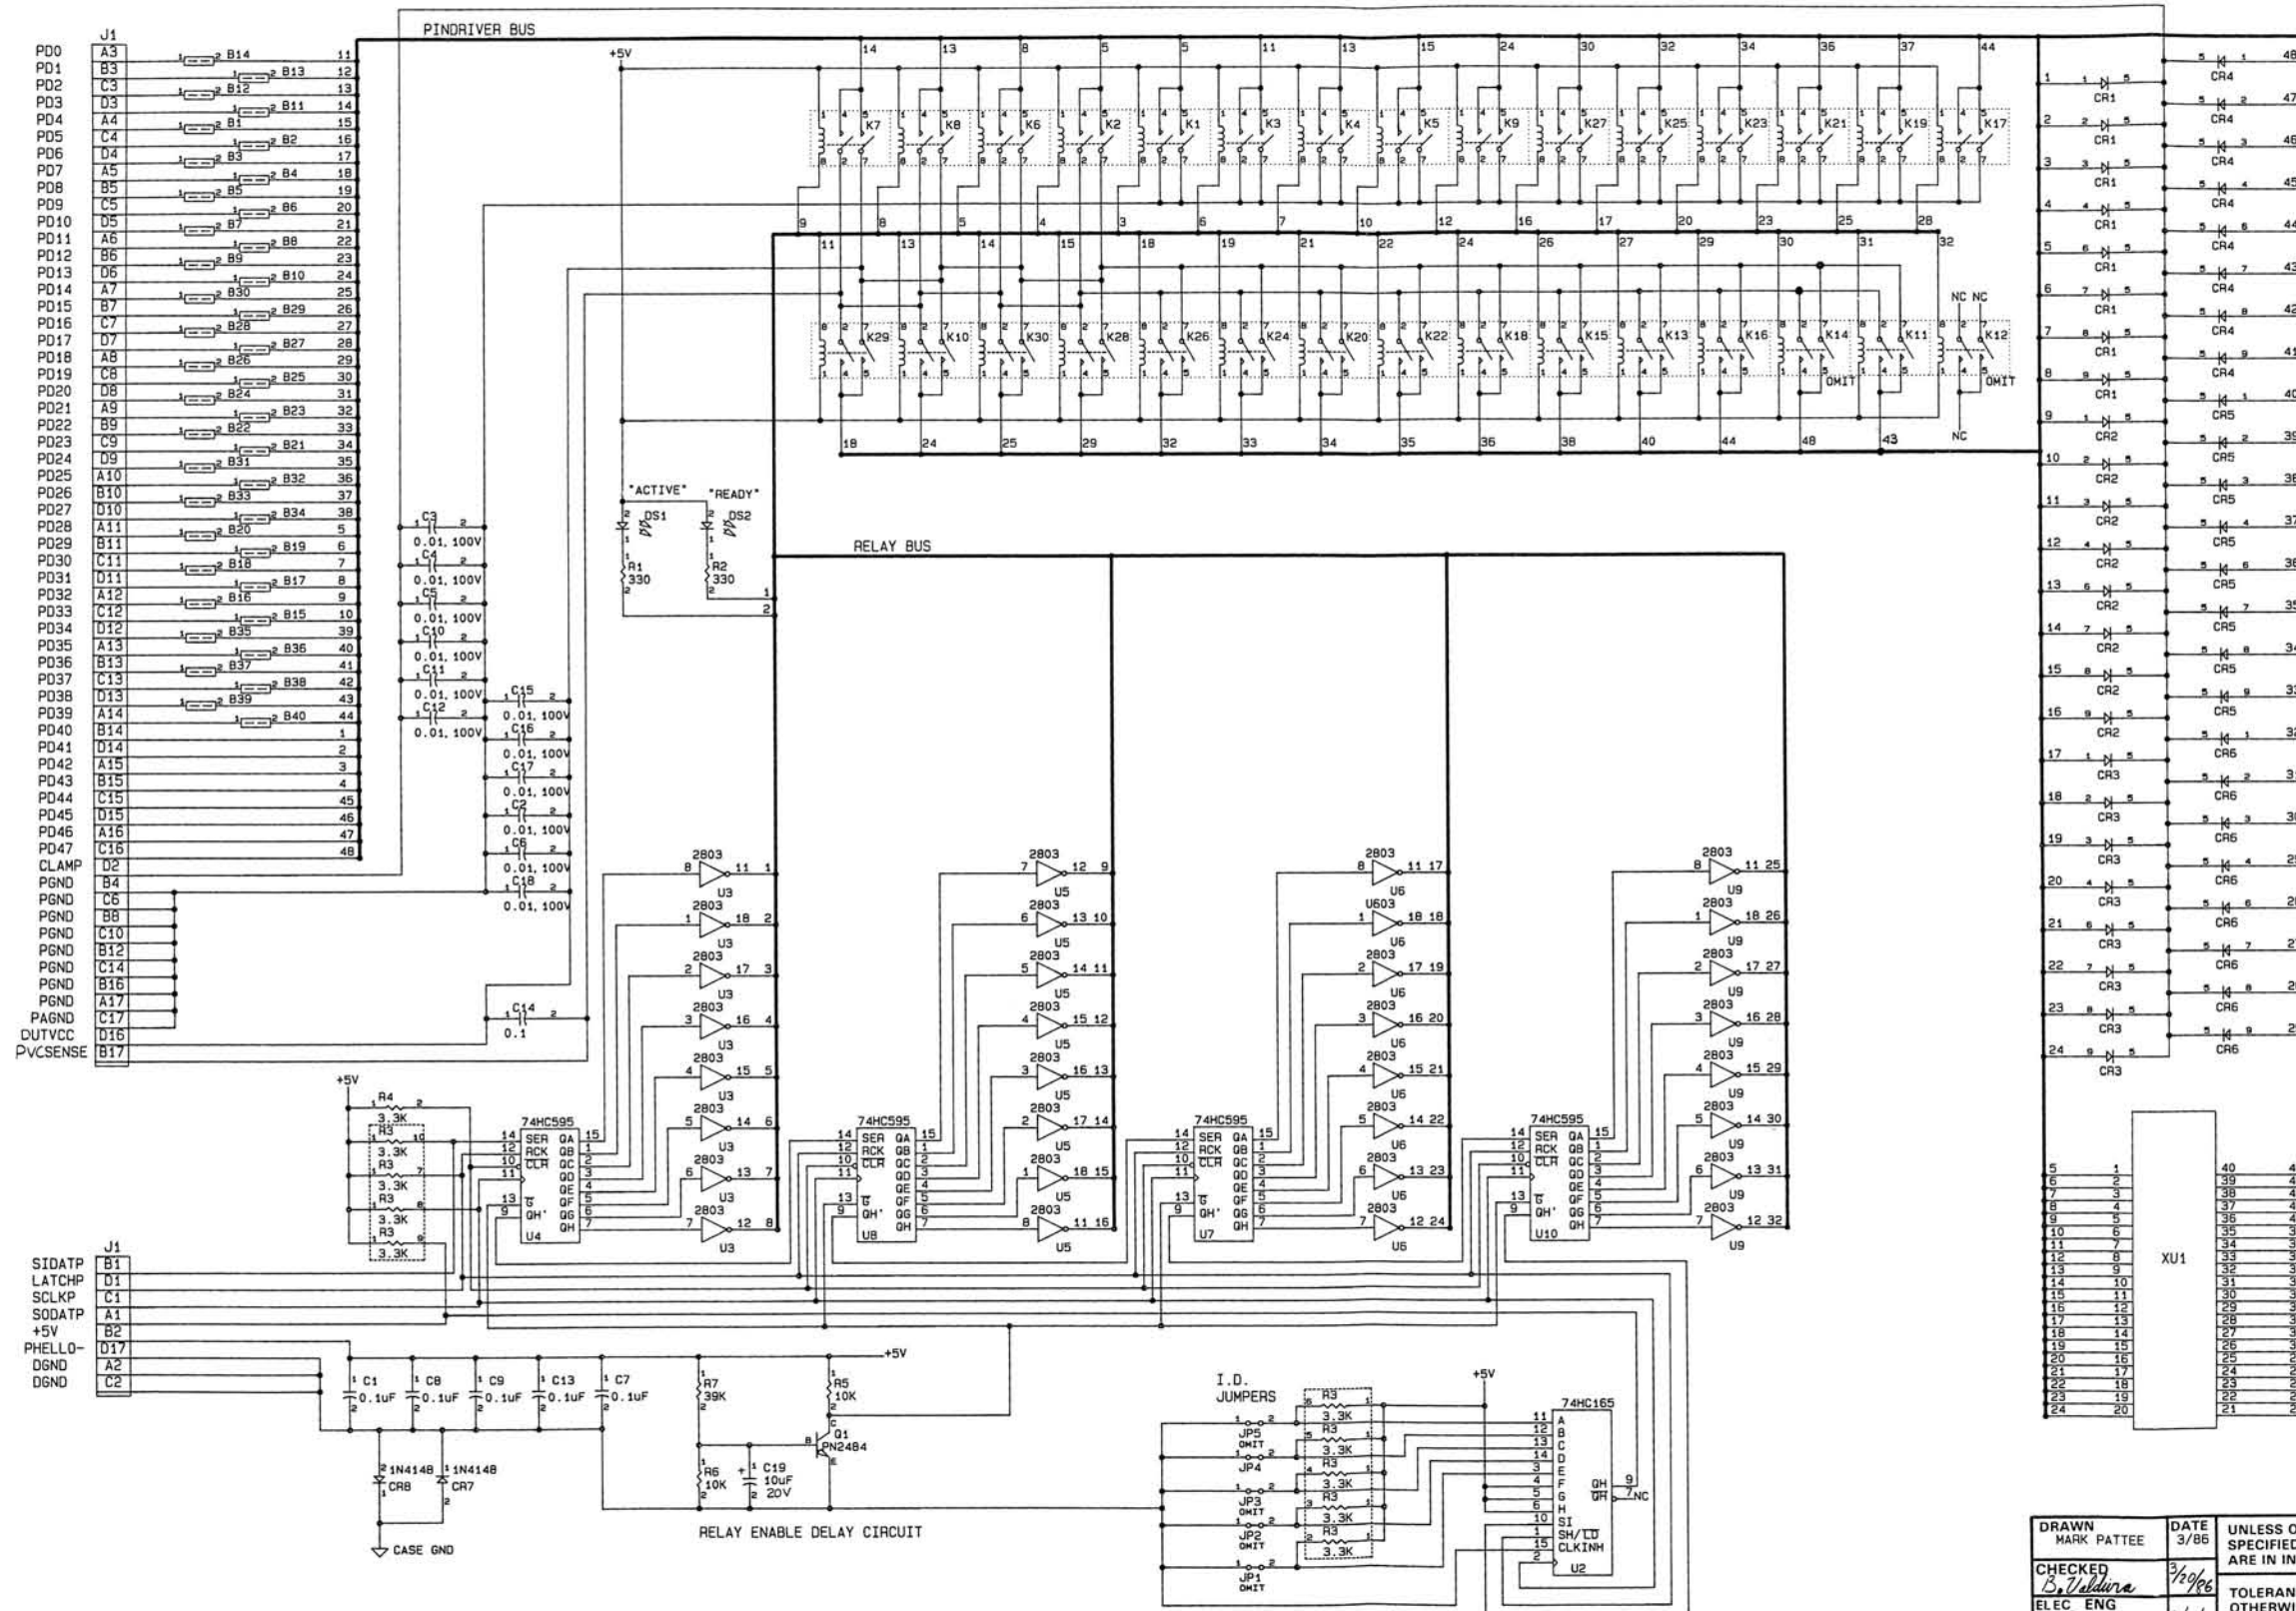

- NOTES: UNLESS OTHERWISE SPECIFIED:
1. ALL DIODES ARE 1N4148.
 2. ALL RESISTORS ARE IN OHMS, 1/4W, 5%.
 3. ALL CAPACITORS ARE IN MICROFARADS, 50V.
 4. LAST REFERENCE DESIGNATORS USED:
J1, CR8, C19, U10, R7, K30, JP5, DS2, B40.
 5. POWER AND GROUND:

REFERENCE DESIGNATOR	+5V	DSND
U2, U4, U7, U8, U10	16	8
U3, U5, U6, U9	10	9

701-2021-002

DRAWN MARK PATTEE		DATE 3/86	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.		DATA I/O		REDMOND, WASH.	
CHECKED <i>B. Vabura</i>		3/20/86	TOLERANCES, UNLESS OTHERWISE SPECIFIED: XX ± XXX ± ANGULAR		TITLE SCHEMATIC DIAGRAM SITE 28/40/48			
ELEC. ENG <i>C. G. J.</i>		3/21/86	DO NOT SCALE DRAWING		SIZE D	FSCM NO. 54193	DRAWING NO. 30-701- 2021	
MECH. ENG <i>D. W.</i>		3-21-86						
MFG. ENG <i>C. Brown</i>		3/21/86						
QUAL ASSUR <i>C. Brown</i>		3/21/86						
APPR <i>B. Vabura</i>		3/21/86			SCALE NONE		D. A. D.	
							SHEET 1 OF 1	